


Specifications


Model No: DL753562SP

| | | |
|-----------------------|---------------------------|-------------------------|
| Basic Information | Nominal Capacity | 1300mAh |
| | Nominal Voltage | 3.7V |
| | Impedance | ≤ 20mΩ |
| | Weight(Approx.) | 36g |
| | Dimensions | Thickness |
| Width | | 35 ± 0.5mm |
| Length | | 62 ± 2.0mm |
| Charge Condition | Nominal Charge Current | 1300mA(1C) |
| | Voltage | 4.2V |
| | Cut-off Current | 65mA(0.05C) |
| | Ending Time | 1.5h |
| | Max.Charge Current | 2600mA(2C) |
| Discharge Condition | Nominal Discharge Current | 1300mA(1C) |
| | Cut-off Voltage | 3.0V |
| | Max.Discharge Current | Continuous |
| Burst | | 52A(40C) |
| Temperature Condition | Charge | 0~45°C |
| | Discharge | -20~60°C |
| | Storage | -20~45°C |
| Cycle Life | ≥50 Cycles | At 20°C discharge, 23°C |
| Self-discharge | Residual Capacity>92% | At 25°C ± 2°C, 30 days |


Dimensions(mm)

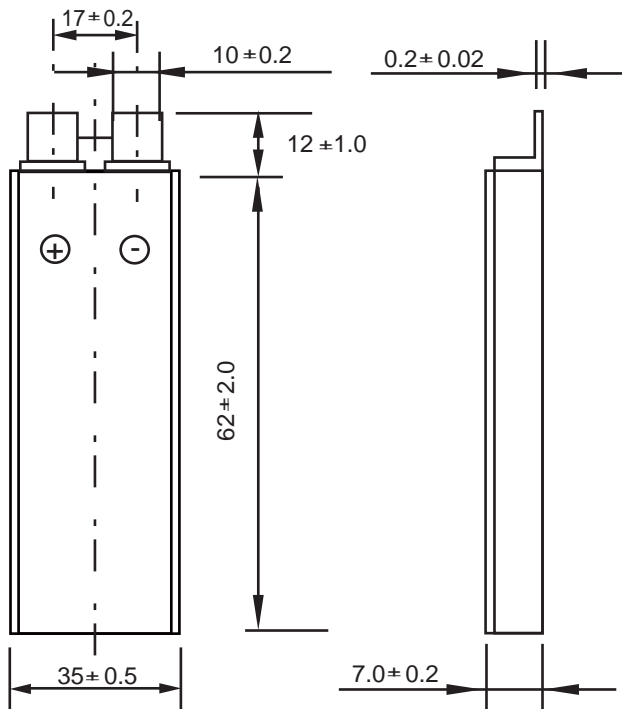


charge characteristics

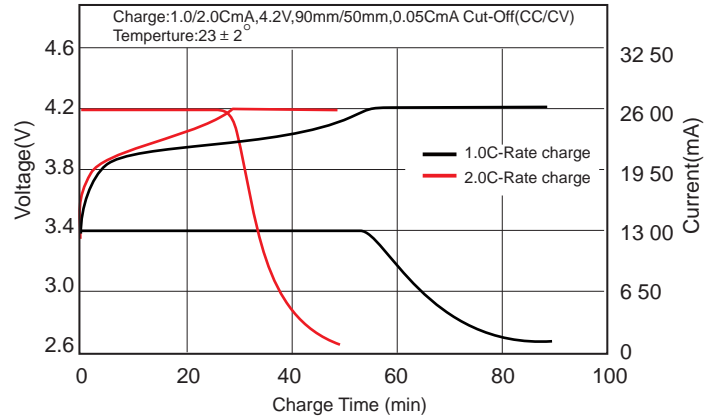

Discharge Rate Characteristics

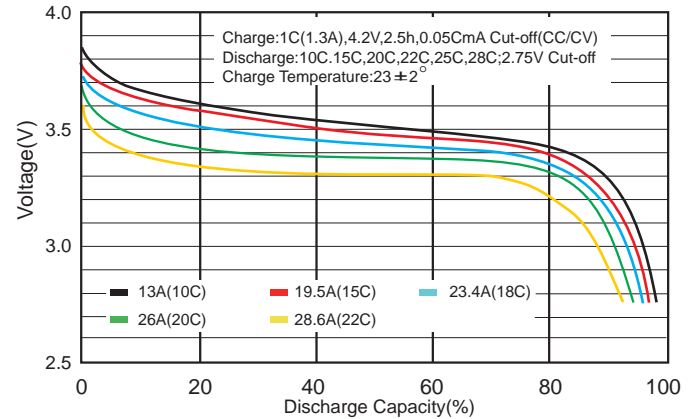

Discharge Temperature Characteristics

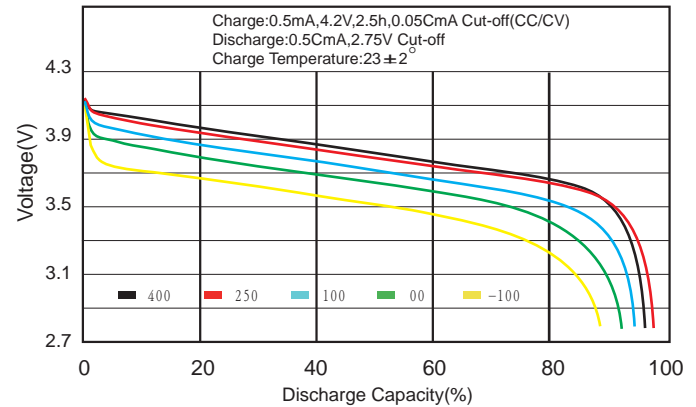

Cycle Life Characteristics

