


### Specifications


**Model No: DL702030SP**

Basic Information	Nominal Capacity	300mAh
	Nominal Voltage	3.7V
	Impedance	≤ 80mΩ
	Weight(Approx.)	8g
	Dimensions	Thickness
Width		20 ± 0.5mm
Length		30 ± 2.0mm
Charge Condition	Nominal Charge Current	300mA(1C)
	Voltage	4.2V
	Cut-off Current	15mA(0.05C)
	Ending Time	1.5h
	Max.Charge Current	600mA(2C)
Discharge Condition	Nominal Discharge Current	300mA(1C)
	Cut-off Voltage	3.0V
	Max.Discharge Current	Continuous
Burst		12A(40C)
Temperature Condition	Charge	0~45°C
	Discharge	-20~60°C
	Storage	-20~45°C
Cycle Life	≥50 Cycles	At 20°C discharge, 23°C
Self-discharge	Residual Capacity>92%	At 25°C ± 2°C, 30 days


### Dimensions(mm)

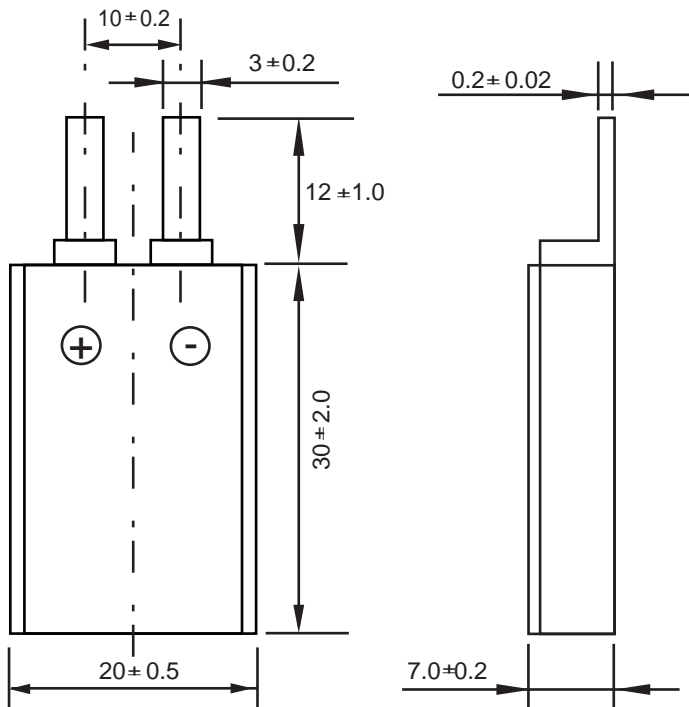


### charge characteristics

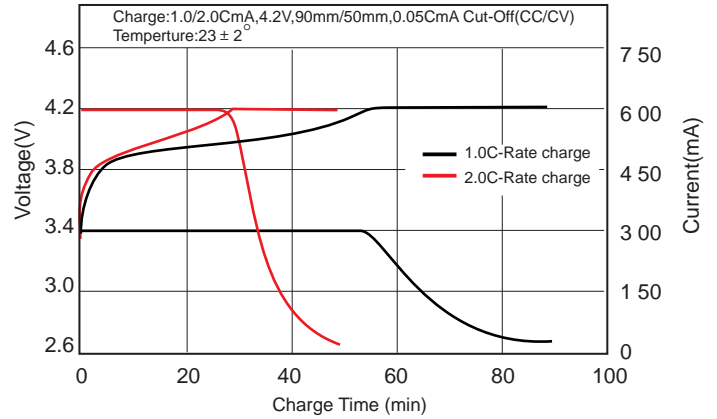

### Discharge Rate Characteristics

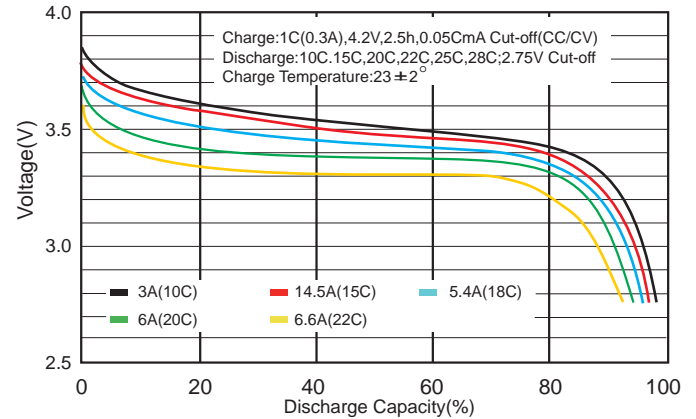

### Discharge Temperature Characteristics

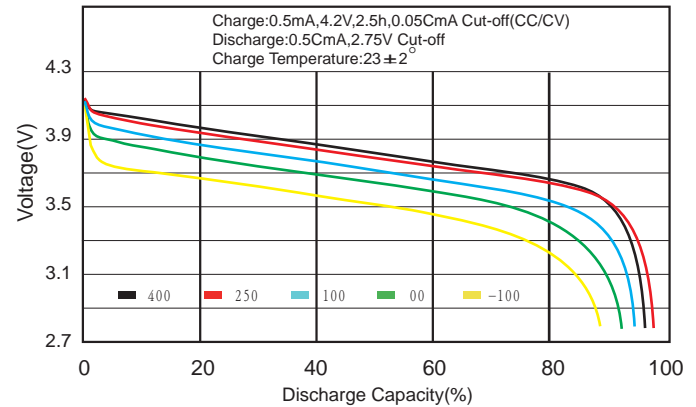

### Cycle Life Characteristics

